




saipem

# SCARABEO 5

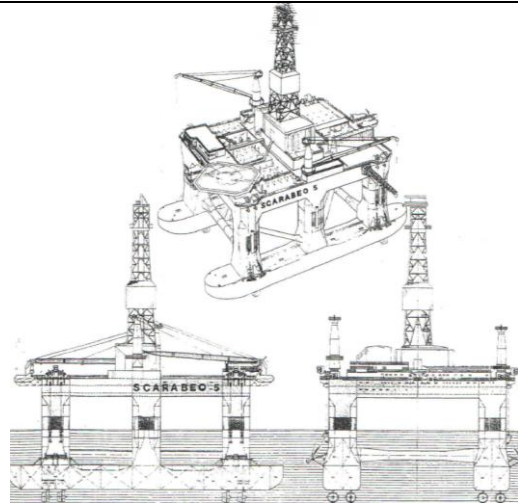

**Dimensions and Characteristics**

Semi Submersible DP class III Drilling Rig  
 Length over all: 111,60m  
 Breadth over all: 87,0m  
 Operation draft: 23,5m (+ 4,2m thruster)  
 Survival draft: 21,5m (+ 4,2m thruster)  
 Transit draft: 9,5m (+ 4,2m thruster)  
 Accommodation: 108 crew  
 Mooring: 8 x winch 76 mm chain 2400 meter  
 Thrusters: 8 x 2350 Kw/ 360 tons of thrust  
 Powerplant: 8 x 3500 Kw.  
 Port of Registry: BAHAMAS  
 Call sign: C6AD7  
 Register nr: 8002069  
 IMO number: 8754970  
 MMSI: 311076700  
 Helideck height operational draft: 26,0m  
 Helideck height transit draft: 40,0m  
 Total air draft in operation: 88,50m  
 Total air draft in transit: 103,25m

**Contact Details/ Communication:**

VHF: 73/16  
 Radio: (+47)52870900/ raop.scarabeo5@saipem.com  
 Wheelhouse: (+47)52870910/ coop.scarabeo5@saipem.com  
 Fax: (+47)52870921  
 OIM: (+47)52870904/ plmr.scarabeo5@saipem.com  
 Company Man: (+47)52871000/ boldsca@statoil.com  
 Deck UHF: Ch 05 (467,550)/ Ch 06 (467,575)

**Starboard and port crane:**

Max capacity 75 tons @24m.  
 Max radius 46,5m (43 tons)  
 Whip line/ Aux line: 15 tons @ 51,5m

**Radius transpondes:**

Port frw: TID 160  
 Port aft: TID 170  
 Starboard frw: TID 190  
 Starboard aft: TID 180  
 Rig is equipped with portable Fan-beam reflectors

Scarabeo 5 has established a 500 meter safety zone.  
 All vessels approaching must obtain permission before enter the 500 meter zone.  
 Permission is given by Scarabeo 5 Wheelhouse.

**Hose Connections port and starboard station:**

Drill water	4"
Diesel oil	4" Avery hardol
Brine	4"
Mud Oil	4" Avery Hardol
Cement	4" Weco 80 psi
Barite	4"
Bentonite	4"

**Marine Hazard:**

8 mooring chains in 360° pattern  
 Bulk vent: Cement vent on port and Barite/ Bentonite vent on starboard