

DATA CARD FLOATEL ENDURANCE

General;

Type: Semi Submersible Accommodation Vessel
 IMO: 9671589
 Largest dimension: 91.0 x 105.0 (BxL)

Flag: Bermuda
 Call Sign: ZCEK4
 Max POB: 440

Contacts:

Bridge; +47 5120 4700, dpo@endurance.floatel.se Chief Officer; + +47 5120 4706
cho@endurance.floatel.se, Storekeeper +47 5120 4723, sto@endurance.floatel.se
 OIM; +47 5120 4705, oim@endurance.floatel.se
 Chief Engineer; +47 5120 4707, cen@endurance.floatel.se

VHF: Listening to Ch 16, work channel to be agreed.

UHF: Work channel to be agreed, frequencies; 468,675 / 458,675 MHz, 468,750 / 458,750 MHz
 468,825 / 458,825 MHz, 468,900 / 458,900 MHz

Loading stations (Port and Starboard);

Type	Coupling	Color code	Capacities
MDO	TODO 4"	N/A	2 450 M3
Pot Water	TODO 3"	Blue	800 M3
Waste Oil	TODO 2"	N/A	N/A
Sewage	TODO 2"	N/A	N/A

Discharge points:


9,5 meter below surface (operation draft)

Cranes:

- Two pedestal electro-hydraulic cranes with the following Onboard lifting capacities :-
 - Main Hoist - 100 MT maximum lifting capacity at 16m radius
 - 73 MT maximum lifting capacity at 30m radius
 - 31 MT maximum lifting capacity at 55m radius
 - Auxiliary Hoist - 15 MT maximum lifting capacity at 60.1m radius
- Large deck area for installation of service equipment's. Deck load 2.5 MT/m2 and designated handling area with 5 MT/m2.

Weather Limitations;

In general, supply vessels operations on windward side should be reviewed if winds exceed 25 knots, or the supply vessel is using in excess of 50% power to maintain position alongside.

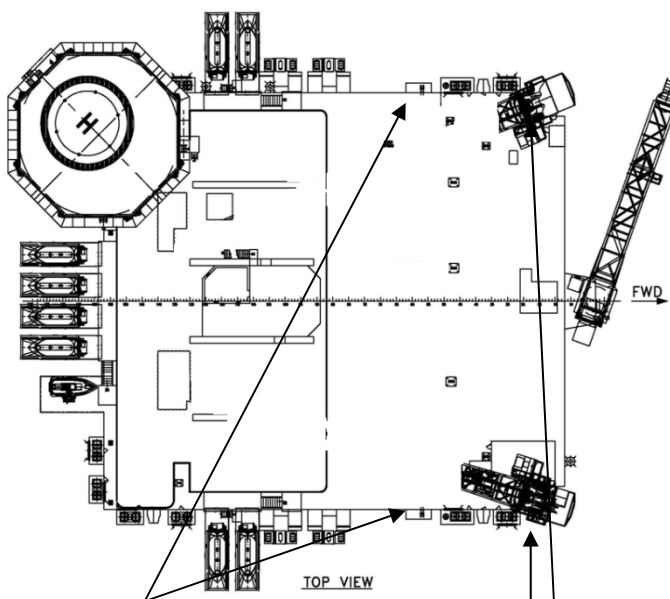

Loading Stations, Hose reel station on Port and stbd side

Deck Cranes