


Songa Encourage

Vessel information sheet

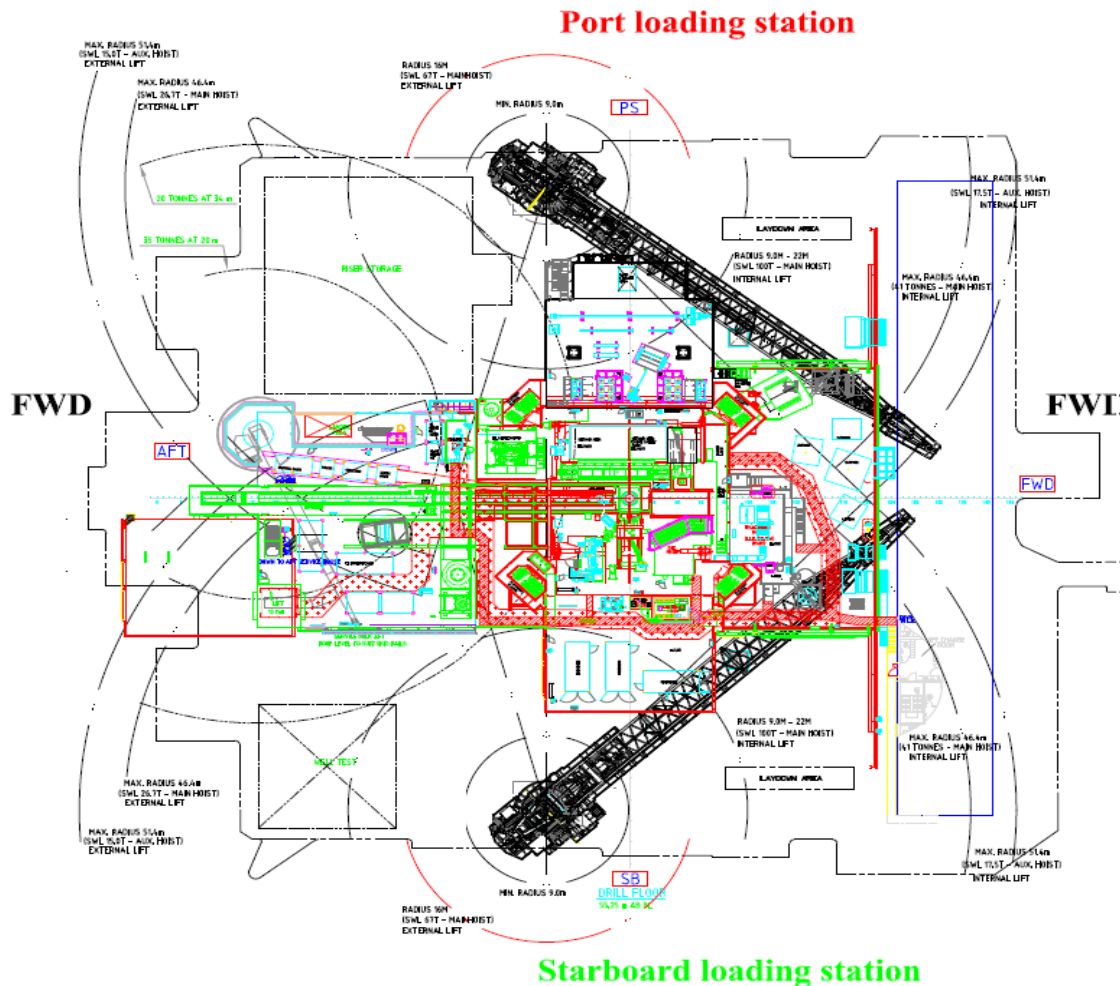

Radius TID stb 160-170/port 180-190.

Rev date 16.04.2016

Communications

CCR/Bridge +47 52 03 40 02/03

Email: dpencourage@songaoffshore.com

VHF: Channel 73 and 16

MMSI: 258627000

Available UHF channels:

1. 467.550 Statioil ch 114
2. 467.575 Statioil ch 115
3. 457.525 Statioil ch 110
4. 457.550 Statioil ch 111
5. 457.575 Statioil ch 112
6. 467.525 Statioil ch 113

Crane limits:

Port crane:

Main line 9m to 28m: 75 tons 3 fall
 Aux 10,7m to 51,4m: 17,5 tons 1 fall

Starboard crane:

Main line 9m to 28m: 75 tons 3 fall
 Aux 10,7m to 51,4m: 17,5 tons 1 fall

All vessels must comply with GOMO guidelines when entering Songa Encourage 500 meter safety zone.

