


Songa Enabler

Vessel information sheet

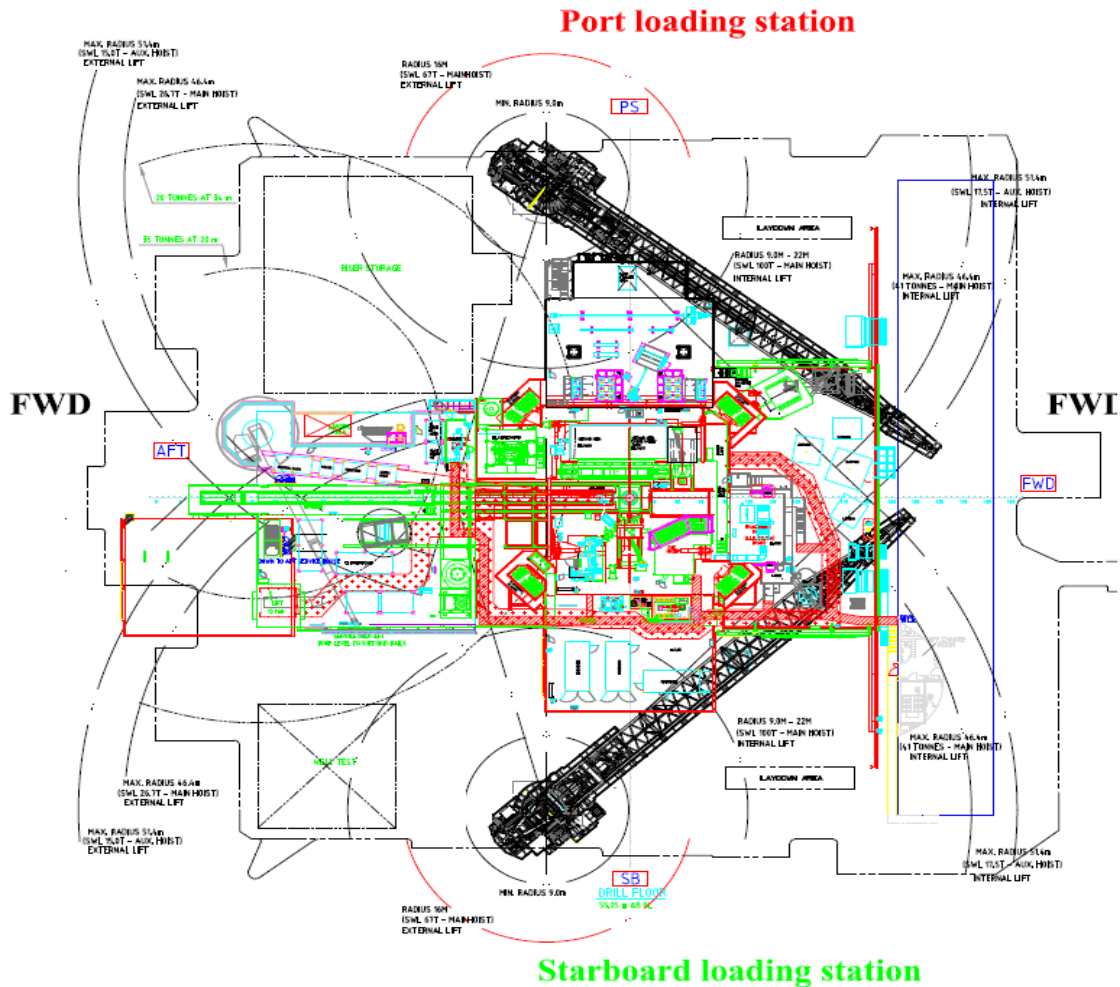

RADIUS 700x TID's: Stb Fwd 150, Stb Aft 160, Port Fwd 170, Port Aft 180

Rev date 02.08.2016

Communications

CCR/Bridge +47 52 00 90 02/03

Email: dpenabler@songaoffshore.com

VHF: Channel 69 and 16

Call Sign: LEWU - MMSI: 258615000

Available UHF channels:

1. 467.550 Statioil ch 114
2. 467.575 Statioil ch 115
3. 457.525 Statioil ch 110
4. 457.550 Statioil ch 111
5. 457.575 Statioil ch 112
6. 467.525 Statioil ch 113

Crane limits:

Port crane:

Main line 9m to 28m: 75 tons 3 fall
Aux 10,7m to 51,4m: 17,5 tons 1 fall

Starboard crane:

Main line 9m to 28m: 75 tons 3 fall
Aux 10,7m to 51,4m: 17,5 tons 1 fall

All vessels must comply with GOMO guidelines when entering Songa Enabler 500 meter safety zone.