


Phone bridge: +47 23672500  
 E-mail Bridge:  
[dpo.promoter@cosl.no](mailto:dpo.promoter@cosl.no)

VHF ch: 68

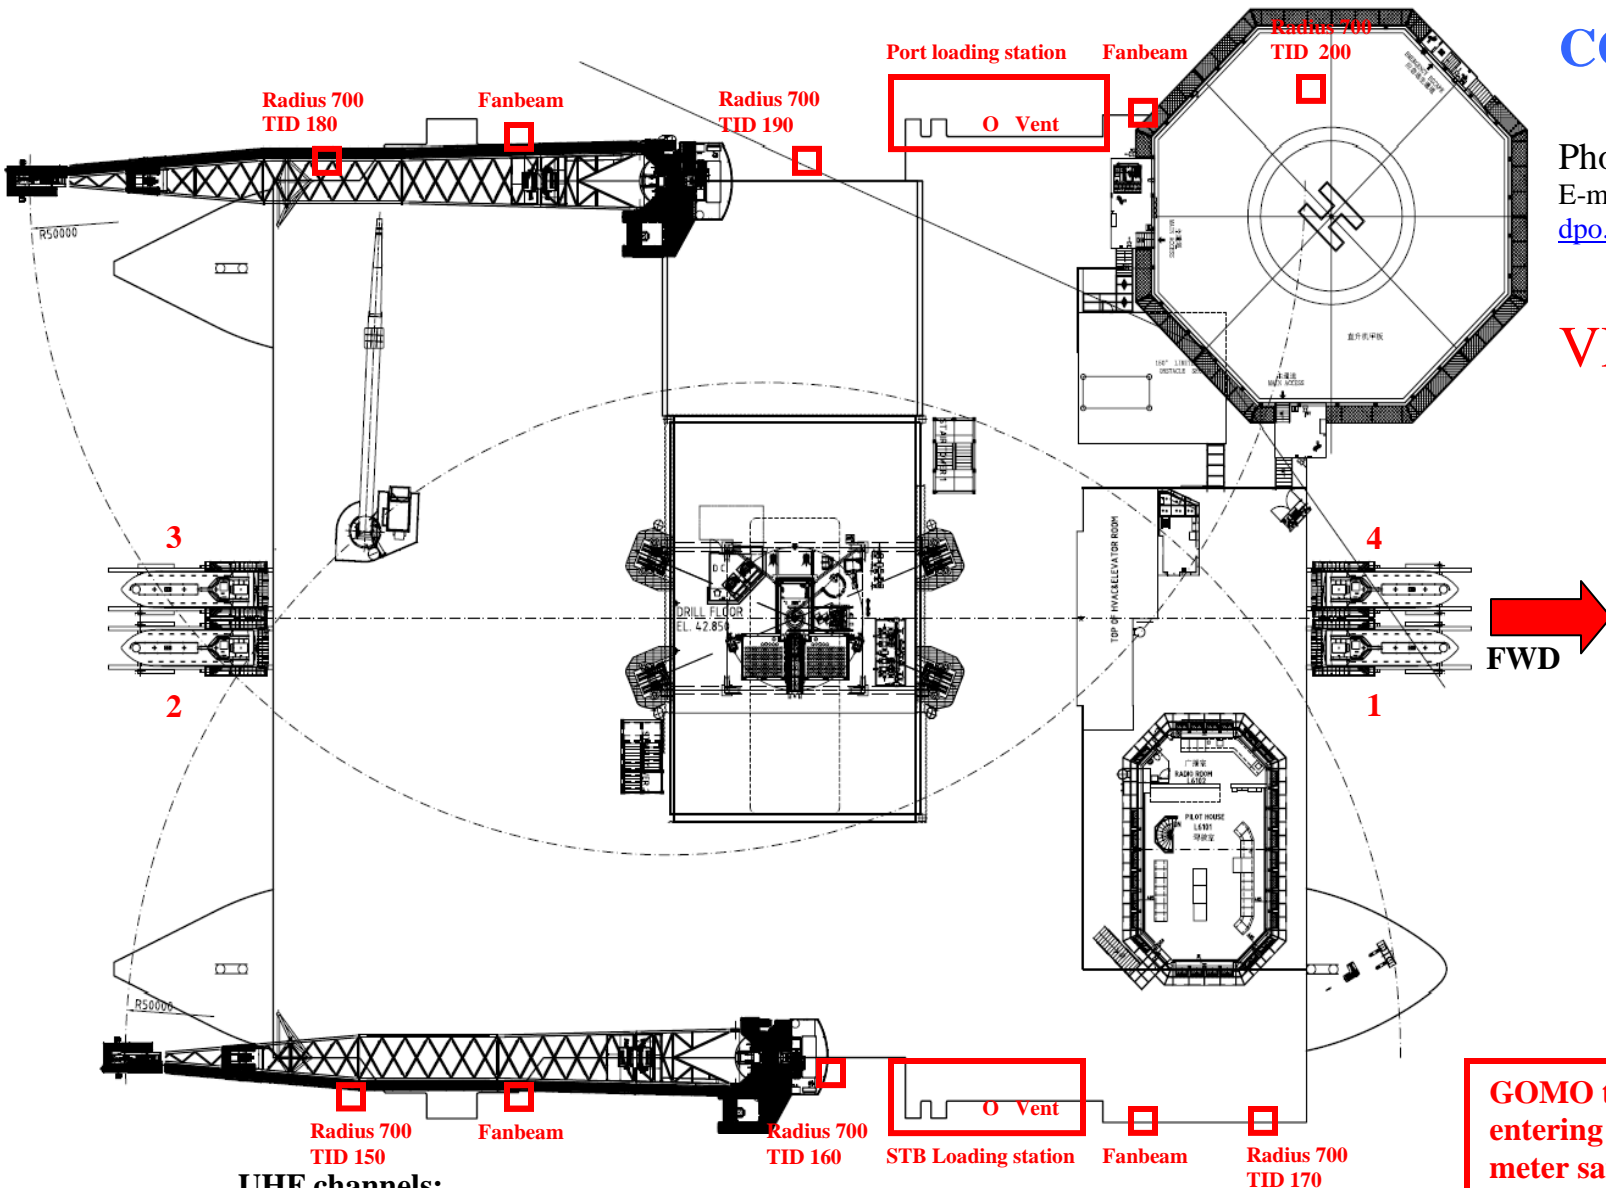

**RADIUS:**  
 STB FWD : TID 170  
 STB CENTER: TID 160  
 STB AFT : TID 150  
  
 PORT AFT: 180  
 PORT CENTER: 190  
 PORT FWD: 200

**GOMO to be followed by all vessels entering COSL Promoter's 500 meter safety zone.**

**NB!**  
**No bunker transfer to be started before bunkers delivery note are delivered on board the rig in hardcopy**

**UHF channels:**

- CH 1 TX 407.8375 RX 417.8375 PL 138,8 Hz **Bridge**
- CH 2 TX 407.8625 RX 417.8625 PL 136,5 Hz **Crane/Deck Statoi ch. 172**
- CH 3 TX 408.2375 RX 418.2375 PL 141,3 Hz **Drilling**
- CH 4 TX 409.2125 RX 419.2125 PL 146,2 Hz **Tech.**
- CH 5 TX/RX 467.5250 Statoi Ch. 019
- CH 6 TX/RX 459.2250 Statoi Ch. 073
- CH 7 TX/RX 468.6500 Statoi Ch. 108
- CH 8 TX/RX 458.2500 Statoi Ch. 071

<b>General information</b>			
Design	: GM4000	IMO/DNV/Call sign	: 8769561 / 28127 / 9VBN8
Classification	: DNV +1A1 Column stabilized Drilling unit (N), Drill (N), DYNPOS-AUTRO, POSMOOR-ATA, CRANE(N), HELDK-SH-E0, ECO	LOA	: 104,5m
Water depth	: 70m-500m (750m optional)	Bm	: 65,0m
Positioning	: IMO DP Class 3 + 8 ea anchor winches(KDPM22)	Operational draft	: 17,75m
Drilling equipment	: NOV	Survival draft	: 15,75m
Operating cond.	: 28 m/s wind, 8 m. Hs sea	Transit draft	: 9,5m (+4,5m for thrusters)
		MMSI	: 565798000
<b>General bulk storage:</b>			
<b>Barite storage Tk`s</b>	: 1 x 150m3 & 1 x 90m3	<b>Mud storage tk</b>	: 200m3 (not incl pits)
<b>Cement Storage Tk`s</b>	: 1 x 150m3 & 1 x 90m3	<b>Drillwater Tk</b>	: 2038m3
		<b>Base oil Tk`s</b>	: 814m3 <b>FW: 600m3</b>
		<b>Brine Tk`s</b>	: 1724m3
<b>Hose connections:</b>			
<b>Drillwater hose</b>	: 2 pcs (one on each side) 4" Weco coupling	<b>Brine hose</b>	: 2 pcs (one on each side) 4" Weco coupling male
<b>Base oil hose</b>	: 2 pcs (one on each side) 4" TodoMatic female	<b>Fuel hose</b>	: 2 pcs (one on each side) 4" TodoMatic female
<b>Mud hose</b>	: 2 pcs (one on each side) 4" TodoMatic female	<b>Barite/bentonite hose</b>	: 2 pcs (one on each side) 5" Weco coupling
<b>Brine hose</b>	: 2 pcs (one on each side) 4" Weco coupling	<b>Cement hose</b>	: 2 pcs (one on each side) 5" Weco coupling Female
<b>Slop hose</b>	: 2 pcs (one on each side) 4" TodoMatic female	<b>Potable water hose</b>	: 2 pcs (one on each side) 4" Weco coupling
<b>Crane information</b>		<b>Contact information</b>	
Crane type	: 2 x NOV (Molde crane)	Max working radius:	: 47,5m
Whip hook	: 17Mt @ 49,6m	Min working radius :	: 7,8m
Main hook	: 38Mt @ 47,0m / 80 Mt @20,0m	Bridge	: (+47) 23 67 25 00
<b>Windlass and mooring winches</b>		OIM	: (+47) 23 67 25 40
Quantity	: 4 double winches for ø 90 mm wire "Rolls Royce Marine"	ERO	: (+47) 23 67 25 01
Tot KW per winch	: 600Kw	Inm.	
Rated Pull	: 3200 KN 3rd Layer (Speed low gear: 9,9m/min 3rd layer)	Fleet	: (+00) 870765095111
Heading on rig	: Variable	<b>Listening on VHF CH: 68/10/16</b>	