


PORT
AFT. STB. FWD.

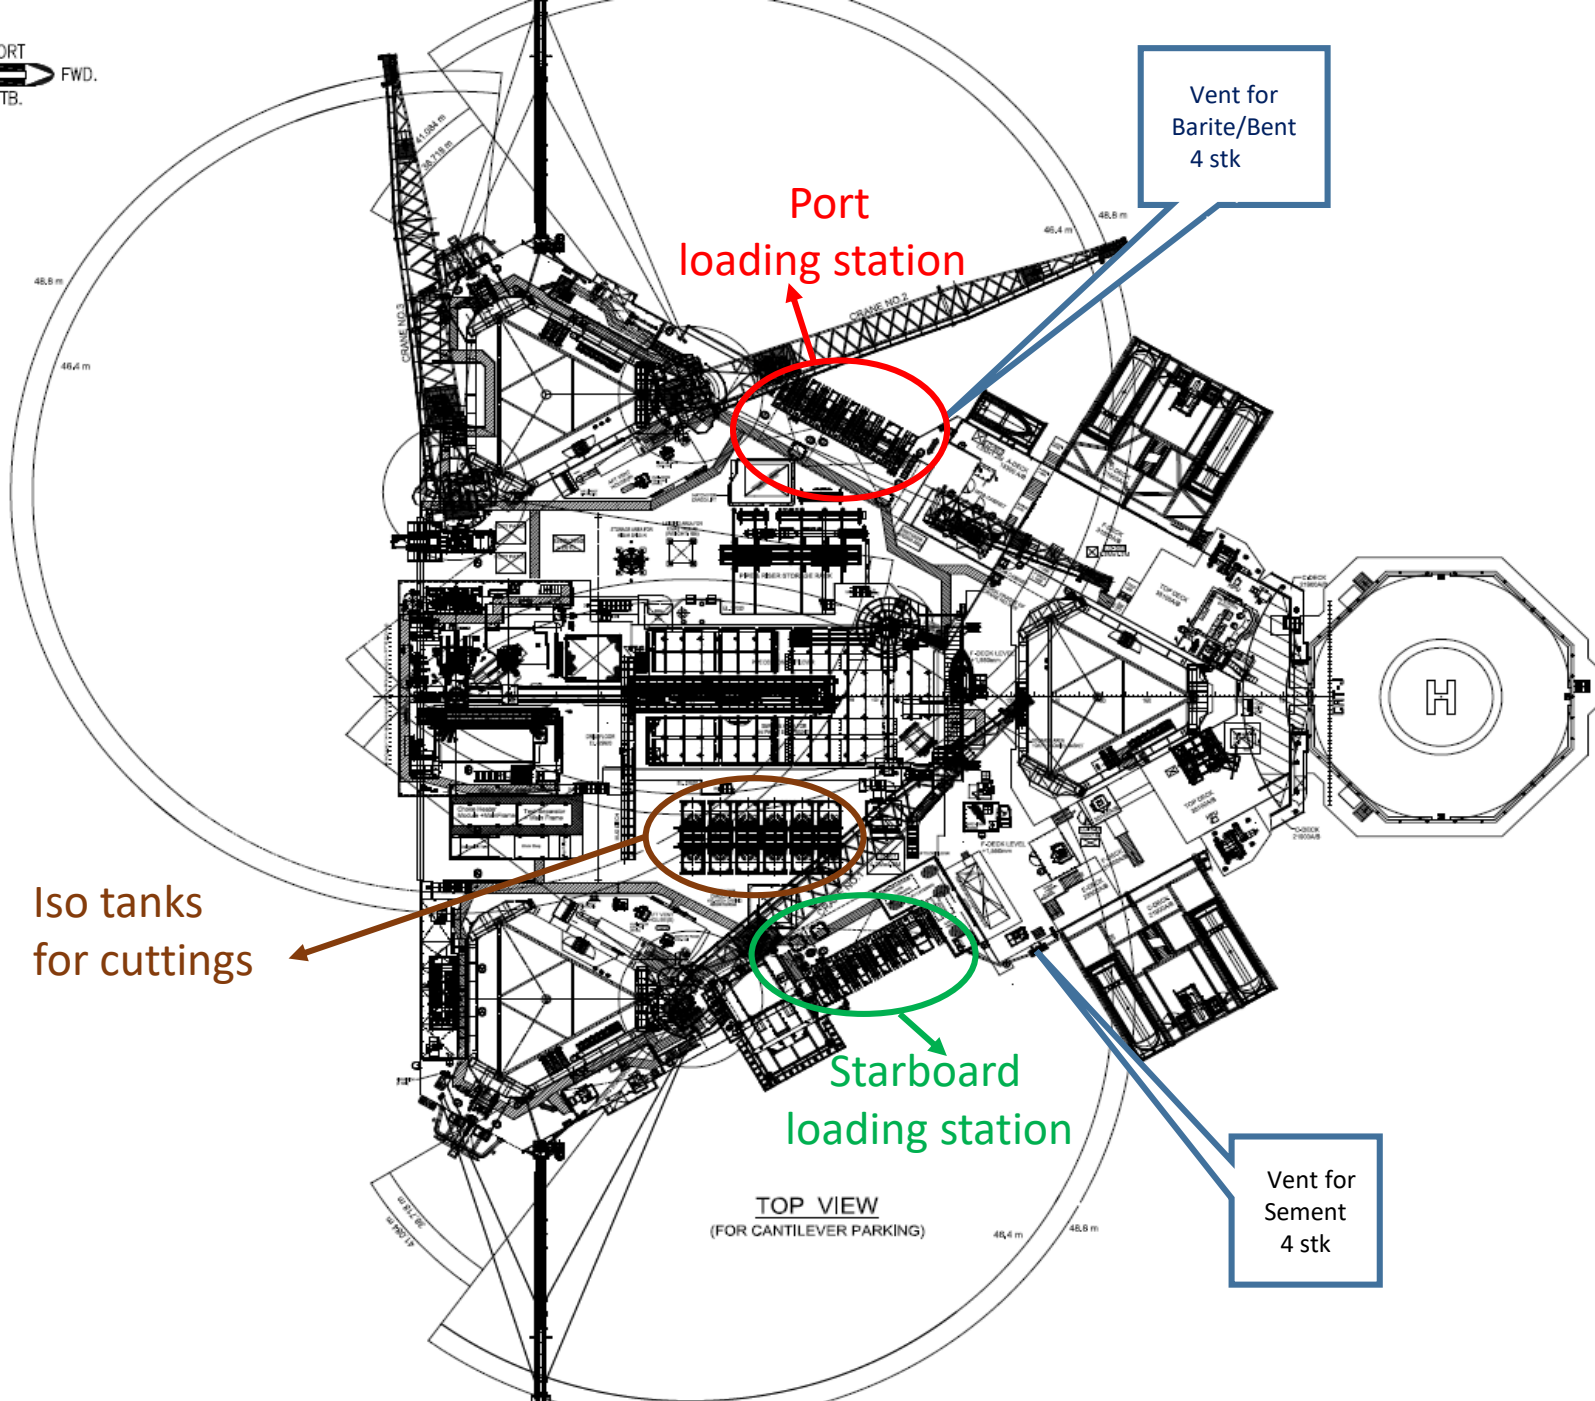

Rig information sheet:

Controlroom: (+47) 52 04 10 00

Email : kontrollromsoperator.askeladden
@no.kcadeutag.com

VHF : 16/09/73

Callsign : LFKL

MMSI no. : 257452000

Available UHF channels:

Ch. 1 457.525 MHz - Statoil Ch. 110

Ch. 2 457.550 MHz - Statoil Ch. 111

Ch. 3 457.575 MHz - Statoil Ch. 112

Ch. 4 467.525 MHz - Statoil Ch. 113

Ch. 5 467.550 MHz - Statoil Ch. 114

Ch. 6 467.575 MHz - Statoil Ch. 115

Crane limits:

Same limits on all cranes:

Whip line 9,4m to 48,8m : 17,5 tons

Main line 7,9m : 43,0 tons

Main line 46,6m : 25,8 tons

Triple fall 8,0m : 65,0 tons

Triple fall 46,5m : 27,1 tons

All vessels must comply to GOMO guidelines when entering Askeladden 500 meter safety zone. Maximum impact energy (MJ) 10,000 tonnes.