

Platform Name:

# Gulfaks C




## Contact Information

Call sign:		E-mail:	gfcskr@equinor.com
MMSI no:		Phone no:	+47 551 47 212
Position datum WGS 84 North, dms:	61°12'52,07"	VHF central control room:	9
Position datum WGS 84 East, dms:	2°16'19,62"	UHF central control room:	

## Contact Information cranes

UHF crane 1	TX/PL TX & RX/PL RX 467,8750/192,8	UHF crane 3	TX/PL TX & RX/PL RX 468,2000/167,9
UHF crane 2	TX/PL TX & RX/PL RX 468,1000/179,9	UHF crane 4	TX/PL TX & RX/PL RX 468,2000/167,9

## Map with zones (not to scale)

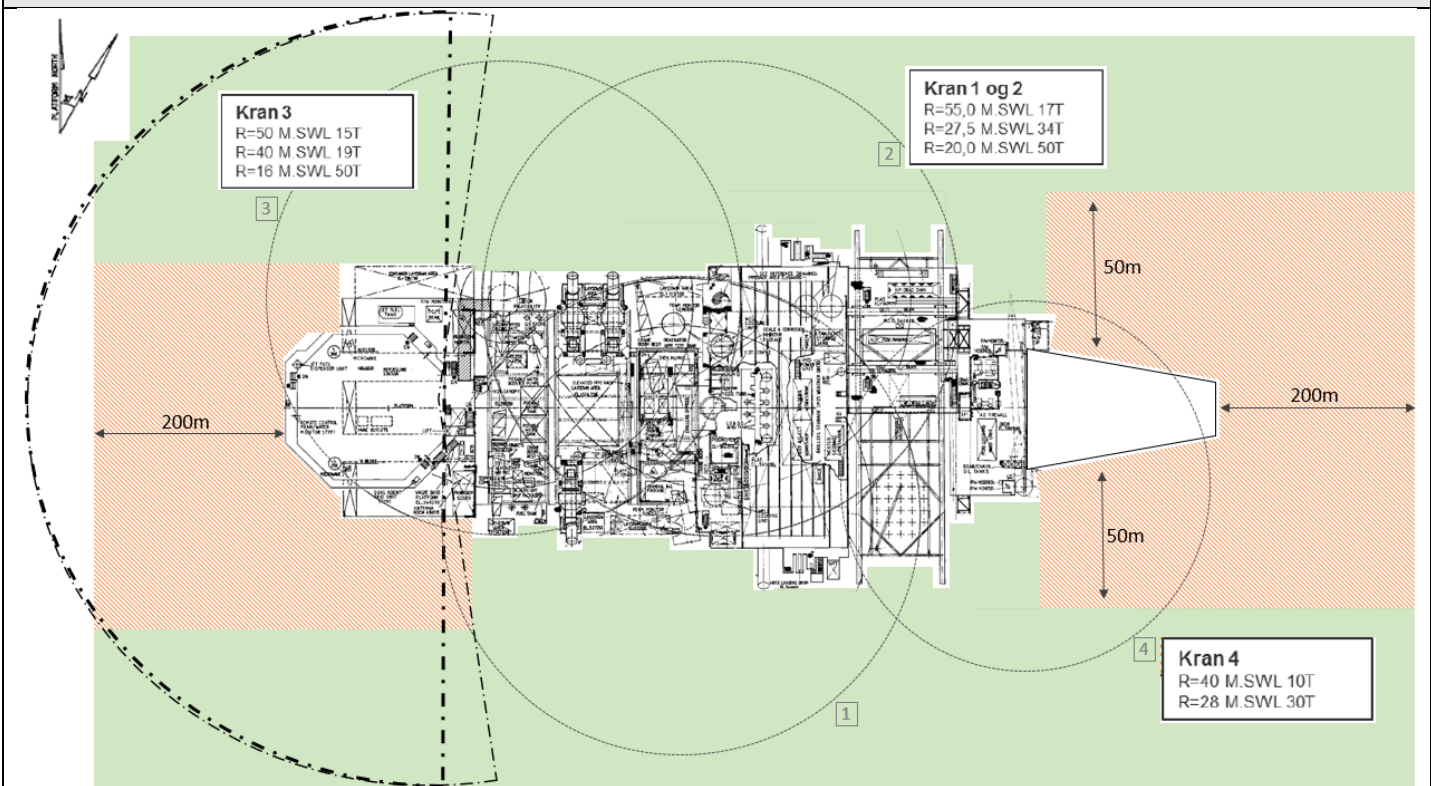

## Zone color coding

Color	Meaning	Reason
<b>Green zone:</b>	Loading/offloading zone. Normal process with approval from the Central Control room	Crane on both south and north side
<b>Orange-striped zone:</b>	Caution zone. Entering this zone needs extra approval from Platform Manager in addition to Central Control room	Operation in these areas should normally not be necessary. Living quarter side: Low hanging life boat structure. Flare boom side: Dropped objects, personnel might be working above, flare line (containing hydrocarbons) might be exposed to collision, high temperature and hot particles from flaring.
<b>Red/Yellow zone:</b>	Exclusion zone. Entering this zone needs approved dispensation.	na

**Other symbols/markings**

180-degree obstacle free helicopter zone  
 210-degree obstacle free helicopter zone  
 Overboard discharges

**Platform specific information**

**Largest allowed vessel displacement without NMO:** 8000t

**Lowest height from MSL to living quarter or lifeboats:** 25m

**Lowest bridge height from MSL:** na

**Displacement / Significant wave height -table for vessel operation on weather side of platform**

E = 14 MJ	
Displacement [ton]	Significant wave height [m]
5000	4.0
6000	3.7
7000	3.4
8000	3.2
9000	3.0
10000	2.8
11000	2.7
12000	2.6
13000	2.5

For vessels above 13000t, the risk must be evaluated. The platform manager shall be contacted.

**Additional information**

- At Gullfaks, there are sensitive detectors that can be triggered by flashes from welding. Welding on deck should therefore not take place on vessels within a radius of 1km (1000m) from the Gullfaks platforms.

Owner: Marine Technology Department Equinor

Rev. No	Date	Name
0	17.01.2020	moksh
1	03.09.2020	inand